

LED Highbay Light

USHBCxxxWBR



Better solutions for a Led Highbay Light

-  **IP65 water-proof**
-  **AC100-277V 50/60Hz**
-  **Easy Installation**
-  **180lm/W**

Operating Temp.: 40°C~ +50°C **Storage Temp.:** 40°C~ +80°C

Options

Power Sosen Driver	Color 3000K 4000K 5000K 5700K	Beam Angle 90°
------------------------------	--------------------------------------------------	--------------------------




Application

Factories, Steel Mills, Steel Smelting Plants, Manufacturing Plants & Warehouses
 Farms and Industrial Installations, sport Facilities & Workshops, Storage Facilities & Warehouses
 Supermarkets & Department Stores, Showrooms, Design Centers & Galleries.


Specifications

Item	Power	Luminous Efficacy	Leds	CRI	Weight	Beam Angle
USHBC60WBR	60W	180lm/W	SMD 5050	> 70	1.82kg	90°
USHBC80WBR	80W	180lm/W	SMD 5050	> 70	2.27kg	90°
USHBC100WBR	100W	180lm/W	SMD 5050	> 70	2.27kg	90°
USHBC150WBR	150W	170lm/W	SMD 5050	> 70	2.57kg	90°
USHBC200WBR	200W	170lm/W	SMD 5050	> 70	3.0 kg	90°


Dimensions(mm)

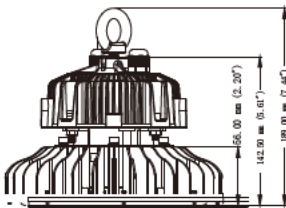

60W/80W/100W

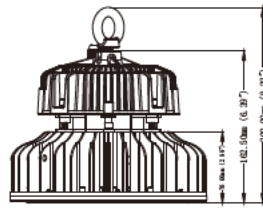

150W

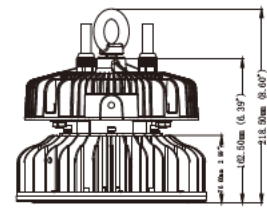

200W



USHBCxxxWBR

LED Highbay Lights

Model Options


Ring for Hook and Chain



U-Bracket



Photometry

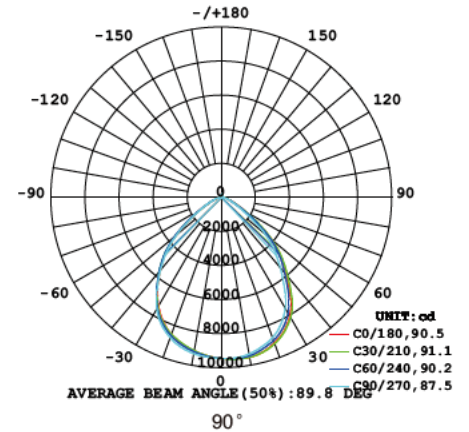

Installation and use

Mounting Ring (Standard)

1

2

3

Power	D1
100W	10mm
150W	10mm
200W	12mm

Mounting U-Bracket

1

2

3

Power	D1	D2
100W	100mm	10mm
150W	100mm	10mm
200W	100mm	10mm

Packing Spec

Item	Box			Carton		
	Measurement(mm)	Gross weight	Pcs/box	Measurement(mm)	Gross weight	Pcs/box
60W/80W/100W	L248*W248*H213	2.40kg	1	/	/	/
150W	L248*W248*H243	2.80kg	1	/	/	/
200W	L278*W278*H243	3.20kg	1	/	/	/