



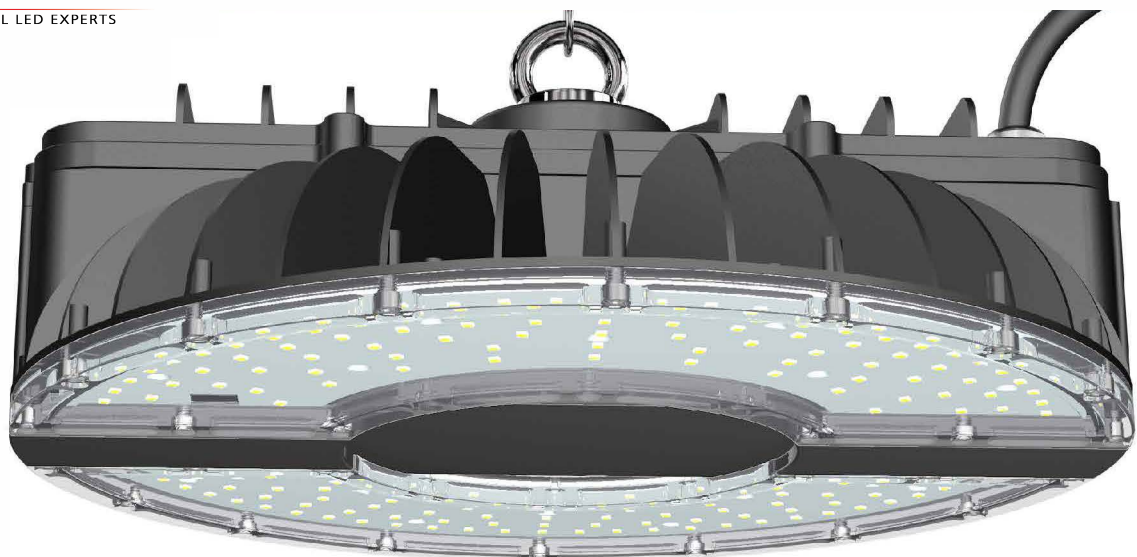


Product Description


- Ultra slim heat sink design makes the lamp lighter and better in heat dissipation
- High lumen SMD3030 chip, luminous efficacy 180lm/w
- Waterproof IP67, high thermal conductivity housing
- Beam angle 120 degree PC lens with transmittance 92%
- Support all kinds of intelligent sensors (Microwave, Daylight, Camera)





kWh/1000h

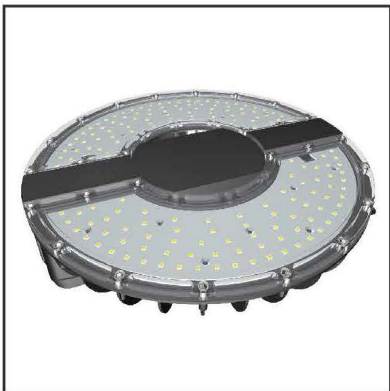

Features

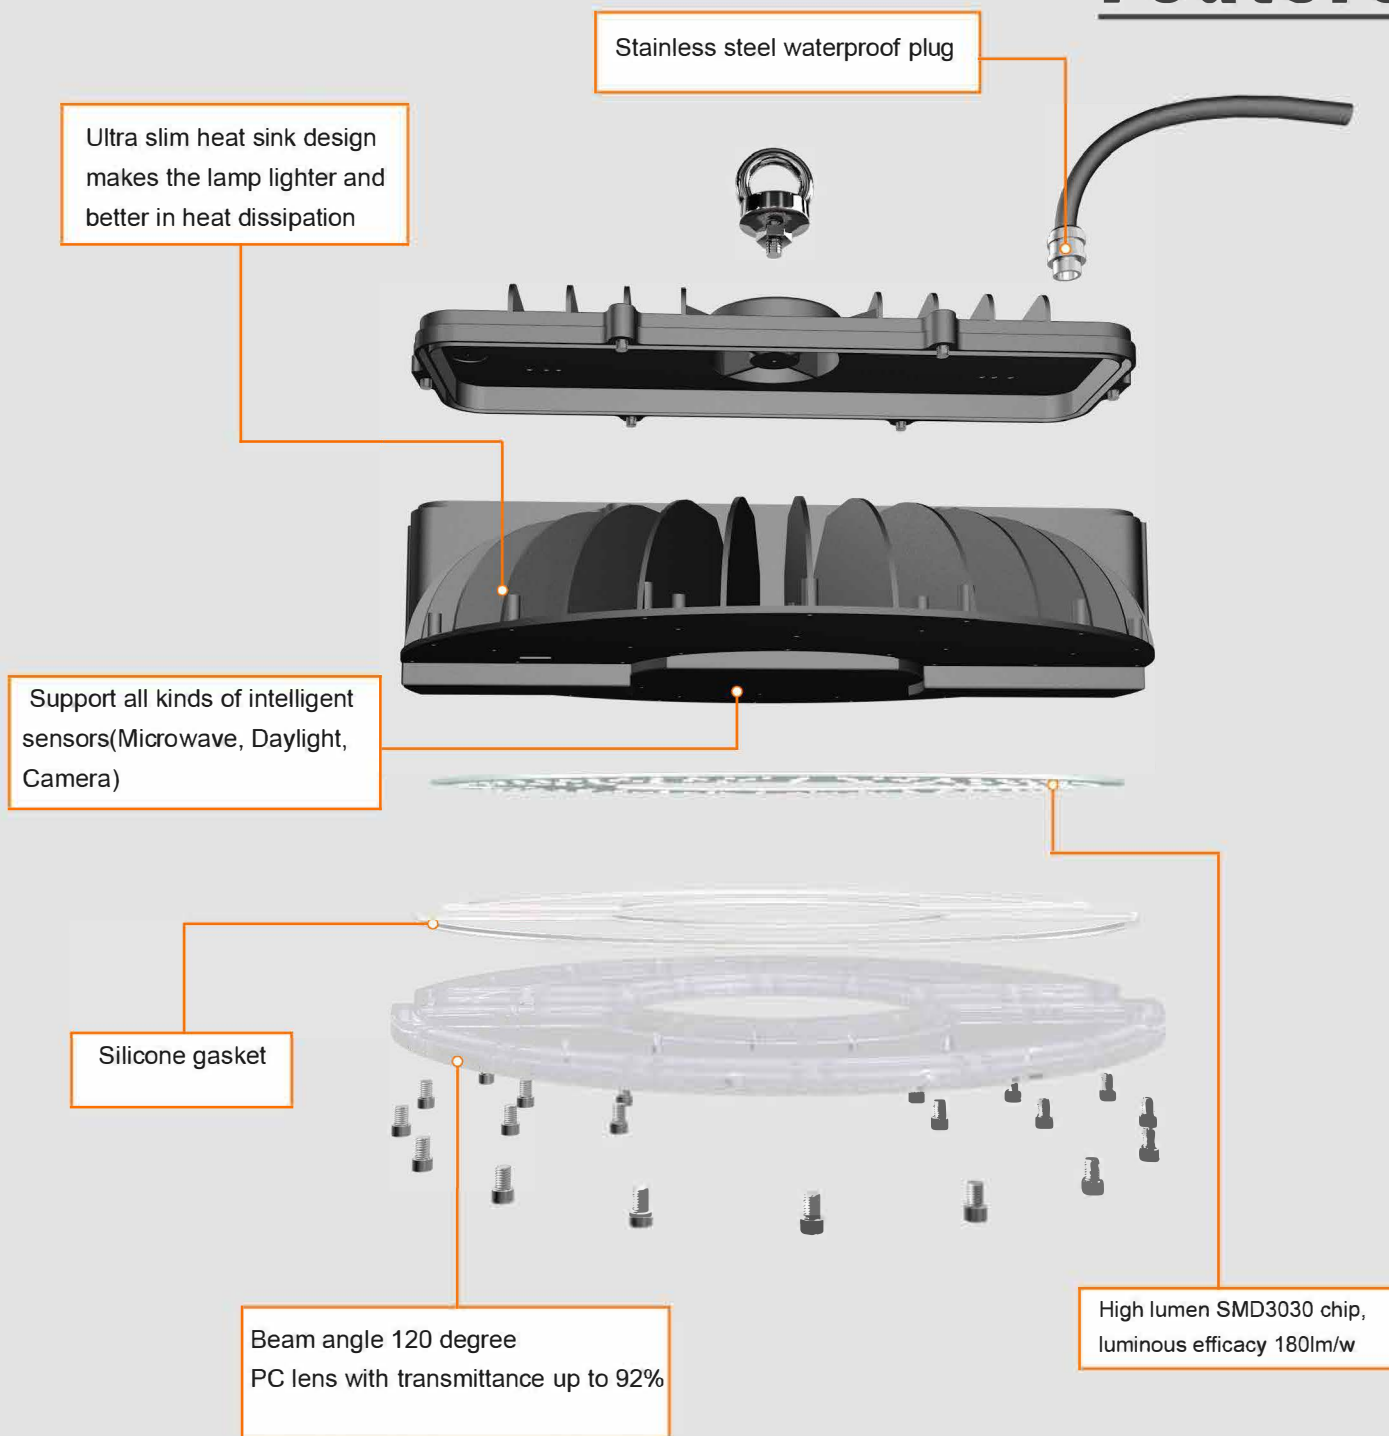

Accessories

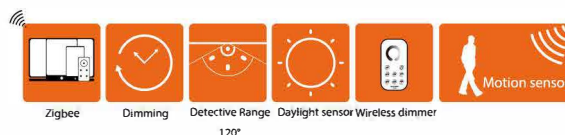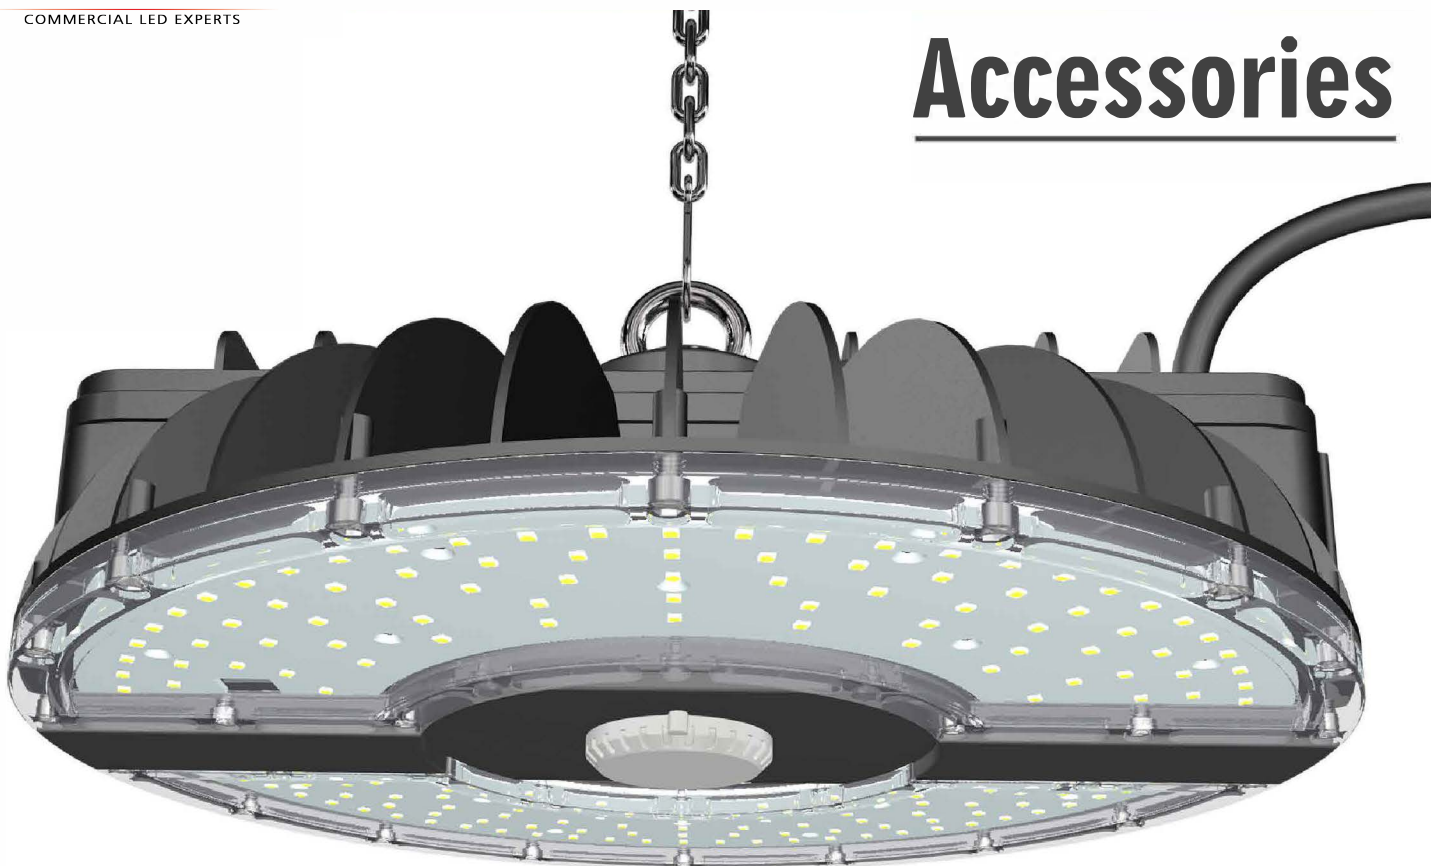

Motion sensor




Daylight sensor



Zigbee wireless control

SEVEN - YEAR
7
WARRANTY

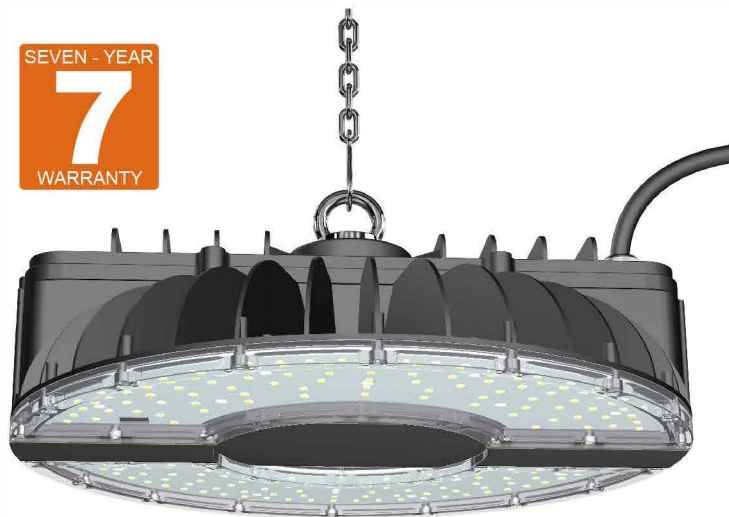


100W

SPECIFICATIONS

Technical Data

Model Number	USHBU100WHS
Power	100W
Luminous Efficacy	150lm/W
Lumen Output	15000lm
LED Quantity	154pcs
Dimension	φ340*113mm
CCT	3000K 4000K 5000K 6000K (Custom Option)
CRI	>80Ra
System Efficiency	≥90%
Lens	120°


Product Dimensions

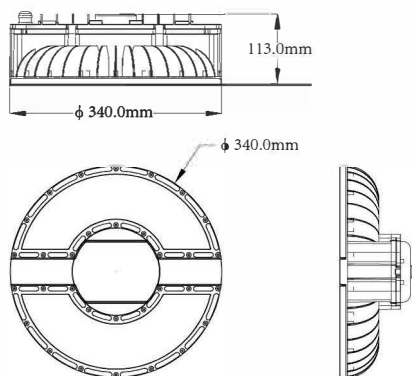

Electrical Details

Input Voltage	AC100-277V/347V/480V
Power Frequency	50-60Hz
Output Voltage	DC36-48V
Power Efficiency	>92%
Power Factor	≥0.95
Total Harmonic Distortion	≤15%
Dimmable	Yes (Optional)


Photometrics

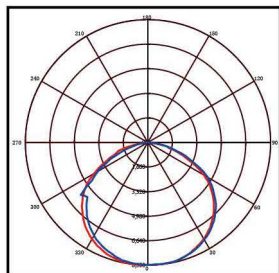

Other Details

IP Rating	IP65 / IP67
Lifespan	100,000+ Hours
Storage Temperature	-40°~65°C
Operating Temperature	-40°~55°C
Luminaire Net Weight	4.7KG
Certification	UL,DLC Premium,SAA,TUV,VEET,CB
Color of housing	Black(customized)

SEVEN - YEAR
7
WARRANTY

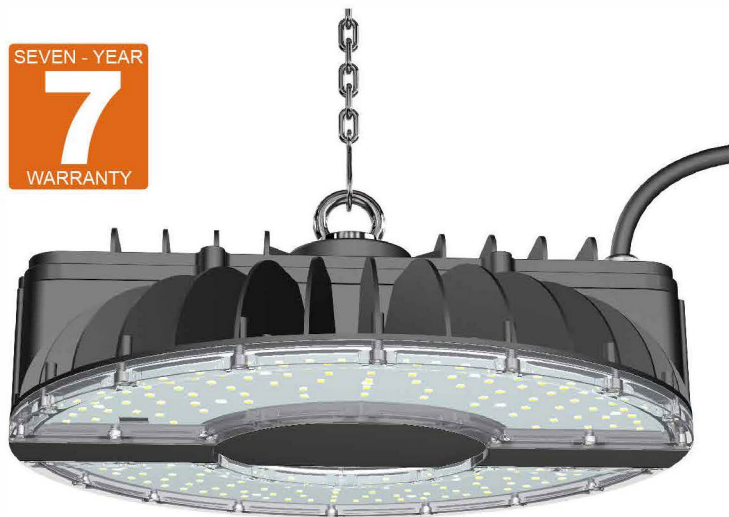


150W

SPECIFICATIONS

Technical Data

Model Number	USHBU150WHS
Power	150W
Luminous Efficacy	150lm/W
Lumen Output	22500lm
LED Quantity	210pcs
Dimension	φ340*113mm
CCT	3000K 4000K 5000K 6000K (Custom Option)
CRI	>80Ra
System Efficiency	≥90%
Lens	120°


Product Dimensions

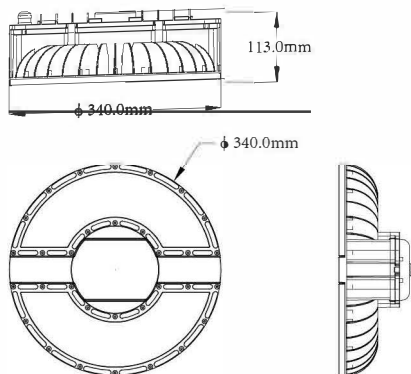

Electrical Details

Input Voltage	AC100-277V/347V/480V
Power Frequency	50-60Hz
Output Voltage	DC36-48V
Power Efficiency	>92%
Power Factor	≥0.95
Total Harmonic Distortion	≤15%
Dimmable	Yes (Optional)


Photometrics



Other Details

IP Rating	IP65 / IP67
Lifespan	100,000+ Hours
Storage Temperature	-40°~65°C
Operating Temperature	-40°~55°C
Luminaire Net Weight	4.8KG
Certification	UL,DLC Premium,SAA,TUV,VEET,CB
Color of housing	Black(customized)

SEVEN - YEAR
7
WARRANTY

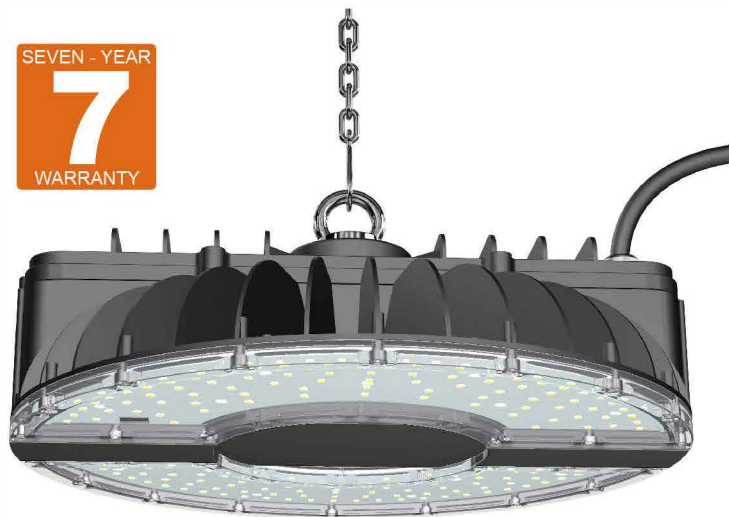


200W SPECIFICATIONS

Technical Data

Model Number	USHBU200WHS
Power	200W
Luminous Efficacy	150lm/W
Lumen Output	30000lm
LED Quantity	288pcs
Dimension	φ340*113mm
CCT	3000K 4000K 5000K 6000K (Custom Option)
CRI	>80Ra
System Efficiency	≥90%
Lens	120°


Product Dimensions

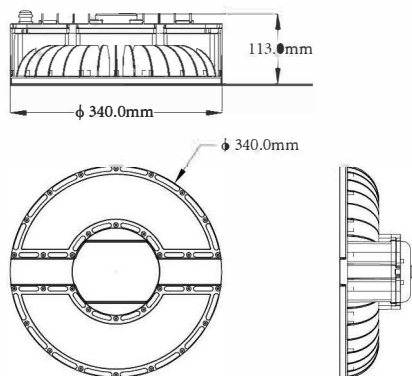

Electrical Details

Input Voltage	AC100-277V/347V/480V
Power Frequency	50-60Hz
Output Voltage	DC36-48V
Power Efficiency	>92%
Power Factor	≥0.95
Total Harmonic Distortion	≤15%
Dimmable	Yes (Optional)


Photometrics



Other Details

IP Rating	IP65 / IP67
Lifespan	100,000+ Hours
Storage Temperature	-40°~65°C
Operating Temperature	-40°~55°C
Luminaire Net Weight	4.9KG
Certification	UL,DLC Premium,SAA,TUV,VEET,CB
Color of housing	Black(customized)

SEVEN - YEAR
7
WARRANTY

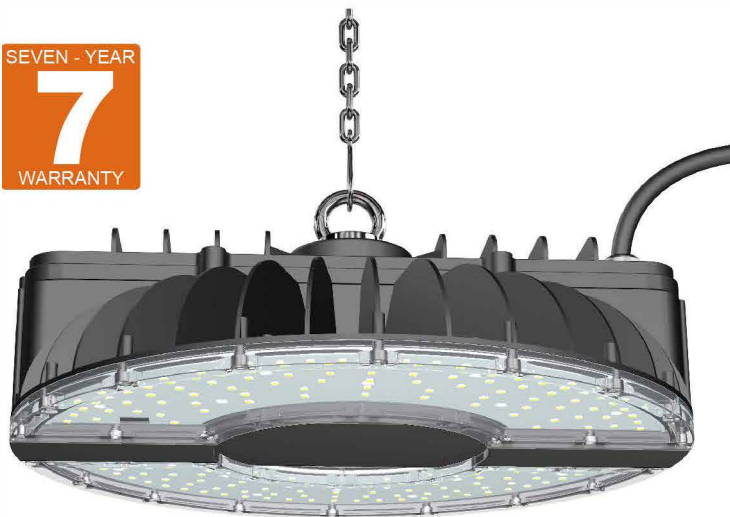


250W SPECIFICATIONS

Technical Data

Model Number	USHBU250WHS
Power	250W
Luminous Efficacy	150lm/W
Lumen Output	37500lm
LED Quantity	308pcs
Dimension	φ340*113mm
CCT	3000K 4000K 5000K 6000K (Custom Option)
CRI	>80Ra
System Efficiency	≥90%
Lens	120°


Product Dimensions

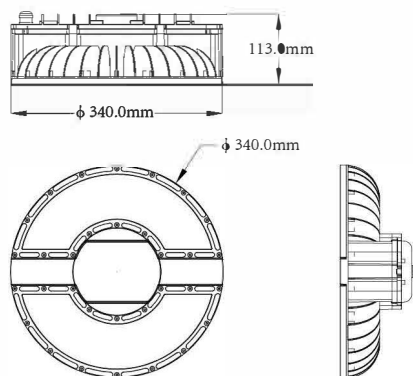

Electrical Details

Input Voltage	AC100-277V/347V/480V
Power Frequency	50-60Hz
Output Voltage	DC36-48V
Power Efficiency	>92%
Power Factor	≥0.95
Total Harmonic Distortion	≤15%
Dimmable	Yes (Optional)



Photometrics



Other Details

IP Rating	IP65 / IP67
Lifespan	100,000+ Hours
Storage Temperature	-40°~65°C
Operating Temperature	-40°~55°C
Luminaire Net Weight	5KG
Certification	UL,DLC Premium,SAA,TUV,VEET,CB
Color of housing	Black(customized)

Installation

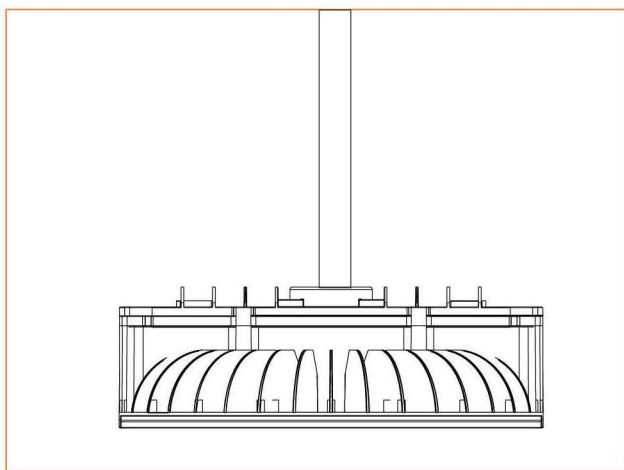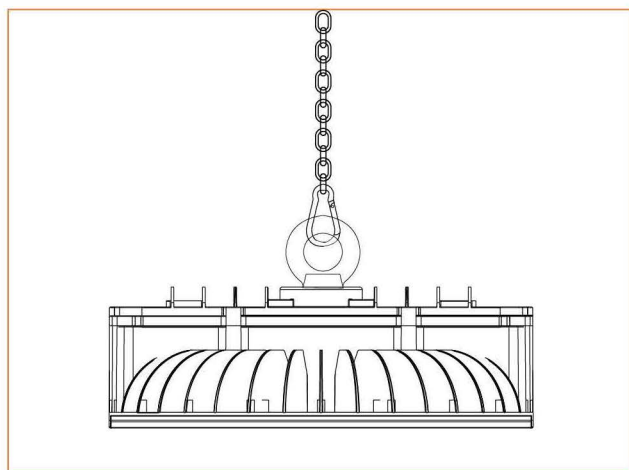

Application



Widely use in workshop, factory, warehouse, stadium, exhibition hall, supermarket, court, etc.

