


SPECIFICATIONS AND FEATURES

Low Bay

Product Type	Round Low Profile Low Bay
Manufacturer	uSaveLED
Model Number.....	USLB40WIDAOK-R
Price.....	\$235.00
Special Price (10+ Units).....	\$215.00
Voltage	100-277VAC
Wattage	40
Lumens	5,200-5,600
Lumens Per Watt.....	130-140
Beam Angle (degrees).....	120°
Mounting.....	Surface Mount or Pendant Mount with Conduit or 1/2" NPT Threaded Pipe
Kelvin (CCT).....	3000/4000/5000/5700/6500
CRI	>70
Life Span (Hours)	50,000+
Dimmable.....	YES (1-10V)
Waterproof.....	YES (IP65)
IK Rating (Impact and Vibration Resistance).....	IK08
Certifications.....	DLC, UL, RoHS
Length of Warranty (YEARS).....	5yr
Dimensions	10.40"x10.40"x4.70"
Weight.....	6.6lbs
Suggested Replacement For:	250W Metal Halide Fixture and Bulb
Percent of wattage saved from average replacement*	84%
(*excludes savings in labor, frequency of bulb changes, ballast, and HVAC savings)	
Notes.....	Motion Sensor Available (Add \$69.00)

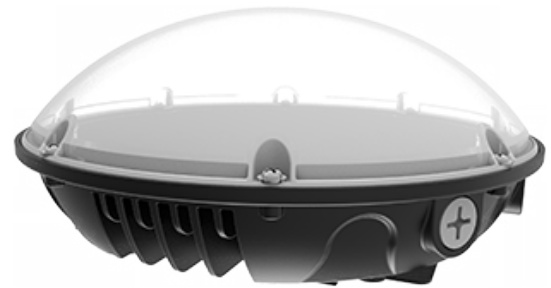

Design Lights Consortium (DLC) and UL Approved for Highest Quality and Rebates. Featuring Ultra Thin Low Profile Design with Powder Coated Aluminum Die-Casted Construction and UV-Stabilized Polycarbonate Lens. This beauty is perfect for all Low Bay and Canopy uses, including warehouses, shopping centers, canopy lighting, gas stations, parking garages, loading docks and much more!

