


SPECIFICATIONS AND FEATURES

Low Bay

Product Type	Round Low Profile Low Bay
Manufacturer	uSaveLED
Model Number.....	USLB60WIDAOK-R
Price.....	\$245.00
Special Price (10+ Units).....	\$225.00
Voltage	100-277VAC
Wattage	60
Lumens	7,800-8,400
Lumens Per Watt	130-140
Beam Angle (degrees).....	120°
Mounting	Surface Mount or Pendant Mount with Conduit or 1/2" NPT Threaded Pipe
Kelvin (CCT).....	3000/4000/5000/5700/6500
CRI	>70
Life Span (Hours)	50,000+
Dimmable.....	YES (1-10V)
Waterproof	YES (IP65)
IK Rating (Impact and Vibration Resistance).....	IK08
Certifications.....	DLC, UL, RoHS
Length of Warranty (YEARS).....	5yr
Dimensions	10.40"x10.40"x4.70"
Weight.....	6.6lbs
Suggested Replacement For:	325W Metal Halide Fixture and Bulb
Percent of wattage saved from average replacement*	81.54%
(*excludes savings in labor, frequency of bulb changes, ballast, and HVAC savings)	
Notes.....	Motion Sensor Available (Add \$69.00)

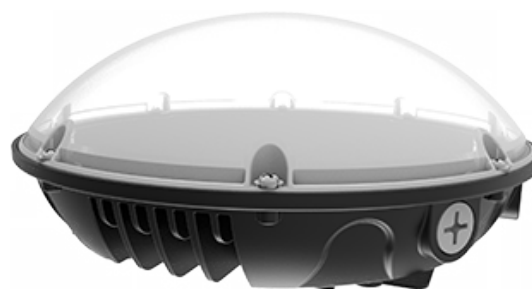

Design Lights Consortium (DLC) and UL Approved for Highest Quality and Rebates. Featuring Ultra Thin Low Profile Design with Powder Coated Aluminum Die-Casted Construction and UV-Stabilized Polycarbonate Lens. This beauty is perfect for all Low Bay and Canopy uses, including warehouses, shopping centers, canopy lighting, gas stations, parking garages, loading docks and much more!