

# LED Circular Area Light




| DLC<br>ETL | USPTSL50WRL | USPTSL75WRL | USPTSL100WRL | USPTSL170WRL |
|------------|-------------|-------------|--------------|--------------|
|------------|-------------|-------------|--------------|--------------|

|   |                |                            |                |                |
|---|----------------|----------------------------|----------------|----------------|
| Input Watts                                 | 50W            | 75W                        | 100W           | 170W           |
| Lumens (lm)                                 | 5673 lm        | 8321 lm                    | 9806.8 lm      | 17218 lm       |
| L70 Life (Hours)                            | 54000hours     | 54000hours                 | 60400hours     | 60400hours     |
| Efficacy (lm/w)                             | 120 lm/w       | 116.58 lm/w                | 104.63 lm/w    | 107.14 lm/w    |
| CCT   | 5700 K         | 5700 K                     | 5279 K         | 5284 K         |
| Equivalent Wattage (MH/HID)                 | 100W MH        | 150W MH                    | 300W MH        | 600W MH        |
| Power Factor                                | 0.9952         | 0.9952                     | 0.9776         | 0.9952         |
| Colour Rendering Index (CRI)                | >70            | >70                        | >70            | >70            |
| Operation Temperature                       | -30°C to +50°C | -30°C to +50°C             | -30°C to +50°C | -30°C to +50°C |
| Operation Voltage                           | 100-277Vac     | 100-277Vac                 | 100-277Vac     | 100-277Vac     |
| Dimmable (3 in 1)<br>(1-10VDC/PWM/Resistor) | NO             | Optional<br>(Type: NO Dim) | NO             | NO             |

| LED Wattage | N.WT  | G.W   | 20GP   | 40GP    | 40HQ    |
|-------------|-------|-------|--------|---------|---------|
| 50W         | 5.0KG | 6.8KG | 500PCS | 1080PCS | 1370PCS |
| 75W         | 5.0KG | 6.8KG | 500PCS | 1080PCS | 1370PCS |
| 100w        | 5.7KG | 7.2KG | 500PCS | 1080PCS | 1370PCS |
| 170W        | 6.4KG | 7.8KG | 500PCS | 1080PCS | 1370PCS |

| Package           |
|-------------------|
| 51*51*18cm/CTN/PC |

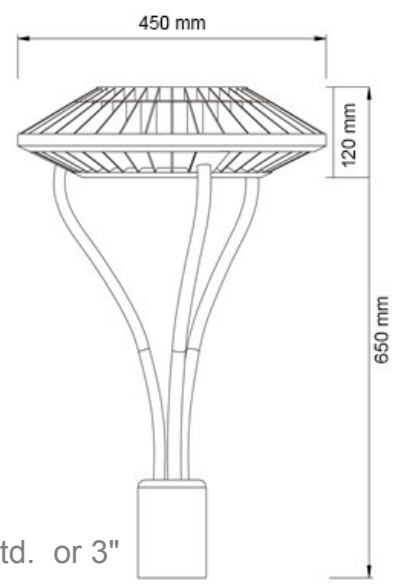

Post Top Tenon Fit: 2-3/8" std. or 3"

Replaces conventional wall lights and floodlights  
 Precision die cast aluminum housing with 5 conduit entries  
 Durable chip and fade resistant powder coat finish  
 Clear transparent glass  
 Mean Well Driver with 5 years warranty  
 IP65 waterproof

Easy installation  
 High Quality LEDs  
 Cast aluminum thermal management for optimal heat sinking  
 Tamperproof hardware