

## LED Shoebox Light



### Better solutions for a Led Shoebox Light



IP65 water-proof



AC100-277V 50/60Hz



Easy Installation



150Lm/w

### Options

#### Power

MEAN WELL DRIVER  
HLG series A: Standard  
HLG series B: Dimmable 1-10V

#### Color

3000K  
4000K  
5700K

#### Lens

Type III  
Type IV  
Type V

#### Beam Angle

115x165°  
110x155°  
140°




### Application

Tunnel light, Sports field, Parking lot, Garden, Residential area,  
Landscape, Architectural decorative lighting, Roads and other places.

### Specifications

| Item       | Power | Lumen   | Leds          | CRI  | Weight  | Lens                        |
|------------|-------|---------|---------------|------|---------|-----------------------------|
| USSL100WBR | 100W  | 15000Lm | LUMILEDS 3030 | > 80 | 7.46kg  | Type III / Type IV / Type V |
| USSL120WBR | 120W  | 18000Lm | LUMILEDS 3030 | > 80 | 7.46kg  | Type III / Type IV / Type V |
| USSL150WBR | 150W  | 22500Lm | LUMILEDS 3030 | > 80 | 7.46kg  | Type III / Type IV / Type V |
| USSL200WBR | 200W  | 30000Lm | LUMILEDS 3030 | > 80 | 9.28kg  | Type III / Type IV / Type V |
| USSL240WBR | 240W  | 36000Lm | LUMILEDS 3030 | > 80 | 9.28kg  | Type III / Type IV / Type V |
| USSL300WBR | 300W  | 45000Lm | LUMILEDS 3030 | > 80 | 12.23kg | Type III / Type IV / Type V |
| USSL400WBR | 400W  | 60000Lm | LUMILEDS 3030 | > 80 | 17.80kg | Type III / Type IV / Type V |
| USSL450WBR | 450W  | 67500Lm | LUMILEDS 3030 | > 80 | 17.80kg | Type III / Type IV / Type V |
| USSL500WBR | 500W  | 75000Lm | LUMILEDS 3030 | > 80 | 17.80kg | Type III / Type IV / Type V |

### Dimensions(mm)

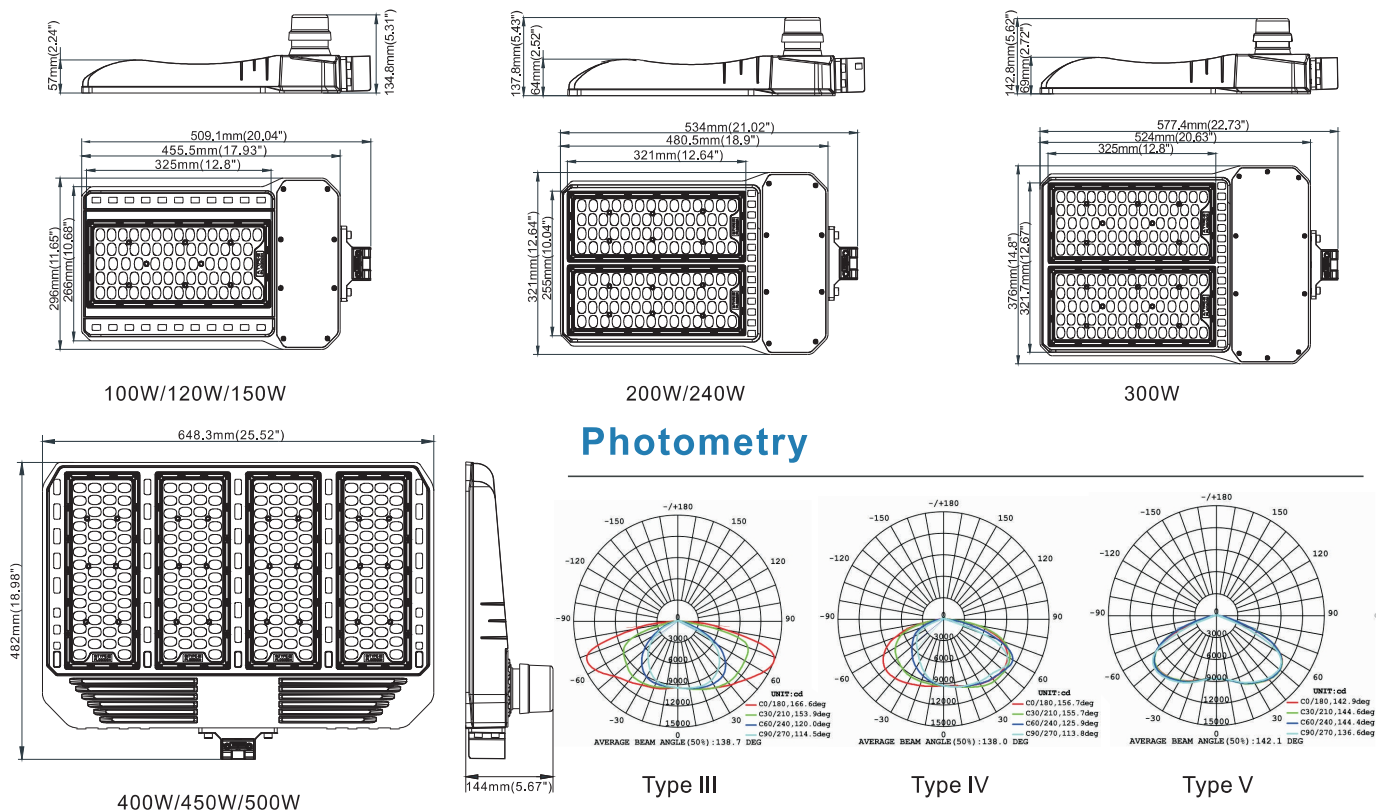

## LED Shoebox Lights

### Model Options



P1 Slip Fitter



P2 Square Mount




P3 Trunnion




P4 Bracket

### Installation and use


#### P1 Slip Fitter

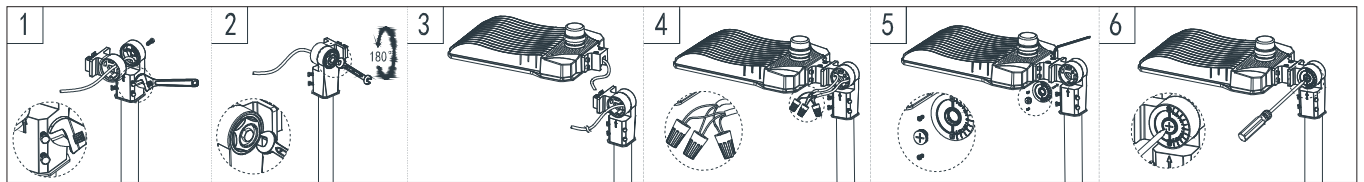


#### P2 Square Mount

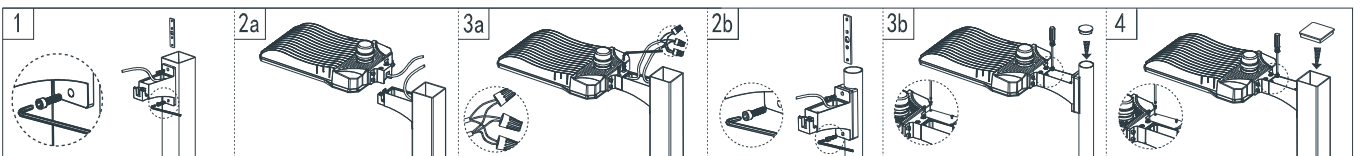

#### P3 Trunnion

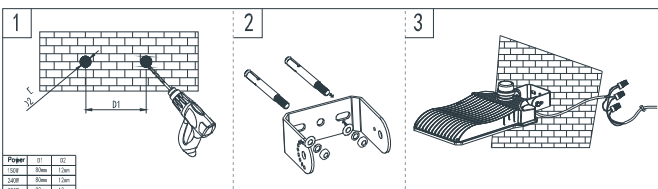

#### P4 Bracket

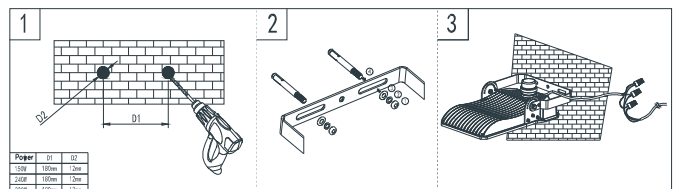

Short circuit cap



photocell sensor available